


# EMDEK 7CBM EFB CHOPPER APPLICATOR

The idea suited to be used with a min 75HP tractor with drawbar & 540RPM Power-Take-Off. It can chop up fresh EFB with a capacity of 2 – 2.5 tons in 8-10 mins. And apply the fibers to the field at the rate of 12-18 tons per hectare. Can be used to chop palm fronds and mixed into the EFB.

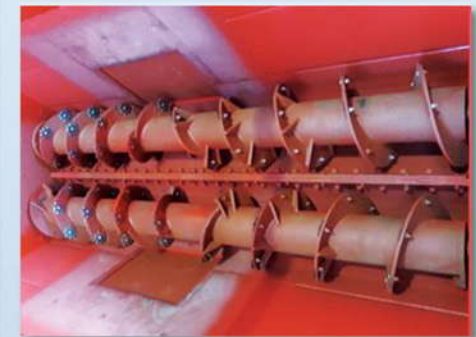

## Specifications :

MODEL	EMDEK 7CBM EFB CHOPPER APPLICATOR
Hopper Capacity	7 CBM
Max. Load Approx. (KG)	Approx. 2,100kg depending on the type and density of material used. Animal feed is estimated 350kg per CBM volume
Type Of Hopper	Mild Steel
Shape Of Hopper	Square Shape
Effective Discharge	Single side on the left hand side. Hydraulically operated discharge chains
Chopping System	Twin augers fitted with 80pcs heavy duty blades & counter blades. The auger design is such that it is able to mix the material evenly while it is being chopper.
Discharging System	Discharge conveyor size (1200mm L x 900mm W)
PTO Speed	540rpm
Tractor PTO	Suitable for tractor PTO shafts with 6 splines 1 3/8" diameter.
Tractor Horespower	Minimum 75hp
Construction Material Used	Hopper and chassis are of heavy gauged mild steel.
Gearbox	Heavy duty planetary coupler gearbox with reduction gearbox.
Clutch & PTO	Heavy duty PTO shaft with appropriate torque limiter protection mechanism.
Axle & Wheels	8 ton axle with 285/70 R19-5 tyres.



## EMDEK SENDIRIAN BERHAD

Lot 10220, Jalan Lombong Emas 5  
Seremban Light Industrial Park  
70200 Seremban  
Negeri Sembilan  
Malaysia

Tel : +60 6 7641320 / 7641216  
Fax : +60 6 7641310  
Emails : [emdek2009@gmail.com/](mailto:emdek2009@gmail.com)  
[sales@emdek.com.my](mailto:sales@emdek.com.my)  
Website: <http://www.emdek.com.my>

ISO 9001 CERTIFIED



CERT. NO. QEC 12384542/13/Q